




Stroco Manufacturing, Inc.
 7233 Polson Lane
 Hazelwood, MO 63042
 ph. (800) 489-6050
 fax (314) 522-8805
 sales@stroco.com

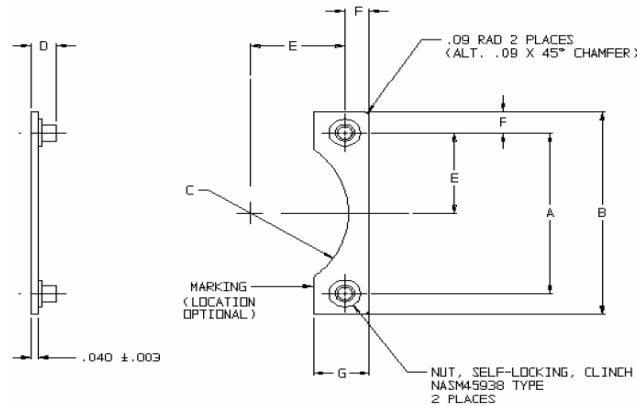

STROCO P/N	SHELL SIZE	T THR'D UNC-3B	"A" (+/- .005)	"B" MAX	"C" MIN	"D"	E (+/- .005)	F REF	"G" MAX	MILITARY M85049/96-
S85049/96-3	3	.112-40	0.625	0.940	0.305	.106/.166	0.312	0.150	0.310	M85049/96-3
S85049/96-7	7	.112-40	0.719	1.034	0.329	.106/.166	0.359	0.149	0.308	M85049/96-7
S85049/96-8	8	.112-40	0.594	0.906	0.262	.106/.166	0.297	0.148	0.306	M85049/96-8
S85049/96-10	10	.112-40	0.719	1.034	0.344	.106/.166	0.359	0.149	0.308	M85049/96-10
S85049/96-12	12	.112-40	0.812	1.124	0.410	.106/.166	0.406	0.148	0.306	M85049/96-12
S85049/96-14	14	.112-40	0.906	1.124	0.477	.106/.166	0.453	0.148	0.306	M85049/96-14
S85049/96-16	16	.112-40	0.969	1.295	0.532	.106/.166	0.484	0.149	0.308	M85049/96-16
S85049/96-18	18	.112-40	1.062	1.405	0.595	.106/.166	0.531	0.164	0.338	M85049/96-18
S85049/96-19	19	.112-40	0.906	1.218	0.461	.106/.166	0.453	0.148	0.306	M85049/96-19
S85049/96-20	20	.112-40	1.156	1.550	0.657	.106/.166	0.578	0.177	0.364	M85049/96-20
S85049/96-22	22	.112-40	1.250	1.680	0.724	.106/.166	0.625	0.195	0.400	M85049/96-22
S85049/96-24	24	.138-32	1.375	1.800	0.782	.123/.183	0.687	0.193	0.396	M85049/96-24
S85049/96-25	25	.138-32	1.500	1.906	0.814	.123/.183	0.750	0.179	0.368	M85049/96-25
S85049/96-27	27	.112-40	0.969	1.281	0.782	.106/.166	0.484	0.149	0.308	M85049/96-27
S85049/96-28	28	.138-32	1.562	2.015	0.895	.123/.183	0.781	0.219	0.448	M85049/96-28
S85049/96-32	32	.138-32	1.750	2.327	1.016	.123/.183	0.875	0.281	0.572	M85049/96-32
S85049/96-36	36	.138-32	1.938	2.515	1.141	.123/.183	0.969	0.281	0.572	M85049/96-36
S85049/96-37	37	.112-40	1.187	1.515	0.625	.106/.166	0.593	0.157	0.324	M85049/96-37
S85049/96-61	61	.112-40	1.437	1.827	0.732	.106/.166	0.718	0.188	0.396	M85049/96-61

SPECIFICATIONS

MATERIAL: Retainer- Aluminum alloy, 6061-T6 per QQ-A-250/11, .040" (+.003/-.003) thickness
 Nut- Self-Locking, clinch type, corrosion resistant alloy steel per AMS5640 (type 303)
 Performance per MIL-N-25027

FINISH: Retainer- Alodine per MIL-C-5541 CI 1A
 Optional- Epoxy Polyamide primer applied per MIL-P-23377
 (Add "-A" to the end of the part number to order the optional primer)
 Nut- Per MIL-N-45938 with dry film lubricant applied per MIL-L-46010

MARKING: Parts to be marked with the respective M85049/96-XXX part number and 19904, if there is enough space.

DIMENSIONS IN INCHES: TOLERANCES UNLESS OTHERWISE SPECIFIED: X.XX +/- .030"; X.XXX +/- .010"; ANGLES +/- .05°

DOCUMENT AND ITS CONTENTS ARE PROPRIETARY INFORMATION TO STROCO AND ITS AFFILIATES, USE WITHOUT AUTHORIZATION IS PROHIBITED.

<u>CAGE NO.</u> 19904	<u>TITLE</u> NUT PLATE DRAWING FOR INTERNAL USE ONLY		<u>PART NUMBER</u> S85049/96-XX REV A 09/10/08
--------------------------	---	--	---