
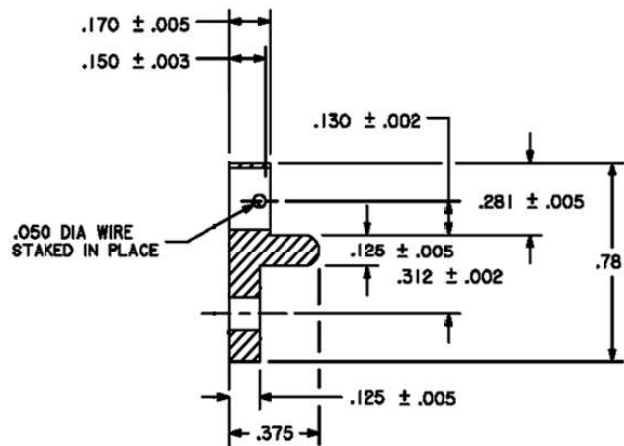


STROCO

Exceeding Your Expectations

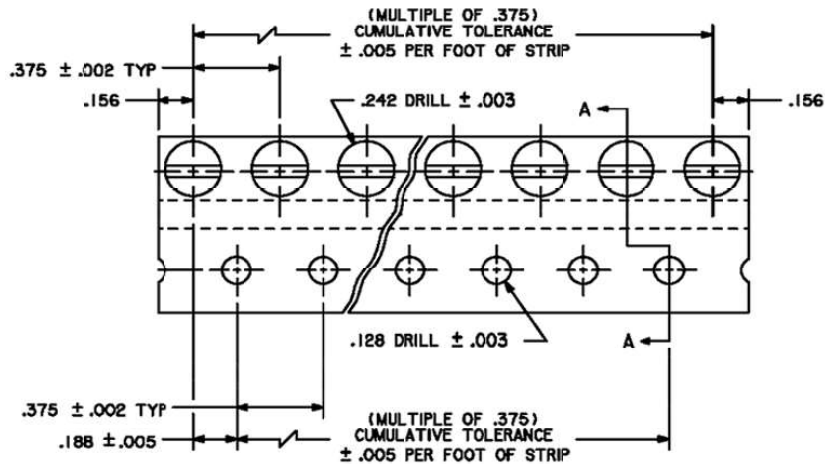

SECTION A-A

MATERIAL:

Wire: 0.050 diameter 316 stainless steel wire,
Condition B, spring temper per ASTM A 313/A 313/M

Receptacle: 6061 T6 Aluminum alloy in accordance with AMS QQ A 200/8

FINISH:

Wire: None

Strip: See Optional Finish Codes below:

No code = No finish

A = Alodine MIL-DTL-5541, Class 1A

IVD = Ion vapor deposition, MIL-DTL-83488, Type II, Class 3.

Ends may be conversion coated in accordance with MIL DTL 5541, Class 1A

N= Anodize per MIL-A-8625, Type II, Class 2

NB = Black Anodize to meet requirements of MIL-A-8625, Type II, Class 2 or

BAC5716, Type II, Class 2. Seal in deionized water or nickel acetate.

EXAMPLE OF CALLOUT:

S2700A-XXX

└── NUMBER OF RECEPTACLE HOLES

└── FINISH

└── BASIC PART NUMBER

MARKING:

PART TO BE MARKED WITH MANUFACTURER AND PART NUMBER PER MIL-STD-130

QUALITY CONFORMANCE INSPECTION:

MIL-F-25173

DIMENSIONS IN INCHES: TOLERANCES UNLESS OTHERWISE SPECIFIED: X.XX ± 0.03; X.XXX ± 0.010; ANGLES ± 0.5°

DOCUMENT AND ITS CONTENTS ARE PROPRIETARY INFORMATION TO STROCO AND ITS AFFILIATES. USE WITHOUT AUTHORIZATION IS PROHIBITED.

<p>CAGE NO. 19904</p>	<p>TITLE RECEPTACLE – TURNLOCK FASTENER, EDGE MOUNTING STRIP</p>	<p>PART NUMBER S2700-XXX <small>XXX= Number of receptacle holes</small> REV C 10/09/2019</p>
---------------------------	---	---

